

How to Record an Entire Contest and Learn From Your Mistakes

Presented by Bob Wilson, N6TV

n6tv@arri.net



Contest Academy



Presentation Overview

- Why record a contest?
- How to record an entire contest
- How to record analog audio on a PC sound card
- How to record digital audio from a radio's sound card
- How to record two radios (SO2R) at once
- How to record with Logging Software
- How to learn from your mistakes (and mine)
- Q & A



Why record the entire contest?

- You can learn a lot
 - Review highlights (and lowlights) with your contest Elmer
 - Send audio excerpts to friends
 - Review Log Check Report, improve skill & accuracy
- You can help others
 - Publish [web page](#) where people can listen to their QSOs with you
 - Bad audio? Bad keying? Send them a clip
- Got intermittent noise?
 - Analyze audio spectrum, send clip to RFI experts
- For top competitors, a recording may be **required**



CQ WW Rule XII.A – Audio Recordings

(See also CQ WPX Rule XIII.C)

- “Any single operator entrant **competing for a top five finish** at the (a) World, (b) Continent, or (c) USA levels, must record the **transmitted and received audio as heard by the operator** for the duration of the contest operation.
- “The recording must be in a common format (e.g., mp3) and should include the **audio to each ear as a separate channel**.
- “The recording must be a **continuous** recording (not a recording of individual QSOs).
- “The recording may be requested by the Committee within 120 days after the log deadline to help adjudicate the log
- “The recording files must be provided by the entrant within 5 days of the request.
- “If no recording is made available, the Committee may reclassify to an appropriate category, reclassify to **Checklog**, or disqualify the entry.”



Can I use a recording to fix my log?

- CQ WW Rule IX.9 (CQ WPX Rule X.I)
“Correction of logged call signs and exchanges after the contest by using any database, **recordings**, email or other methods of confirming QSOs is **not allowed**.”
- So, do *not* use a recording make corrections




How do I make a recording?

- Connect headphone output to PC
- Before the contest starts, start recording
- Simple enough, right?
- Nope
 - Headphone level much too high for MIC or LINE inputs
 - Any recorded audio will be severely distorted
 - Interface circuit required



First challenge


- Headphone audio is stereo, PC MIC input is MONO (even though it uses a stereo plug)

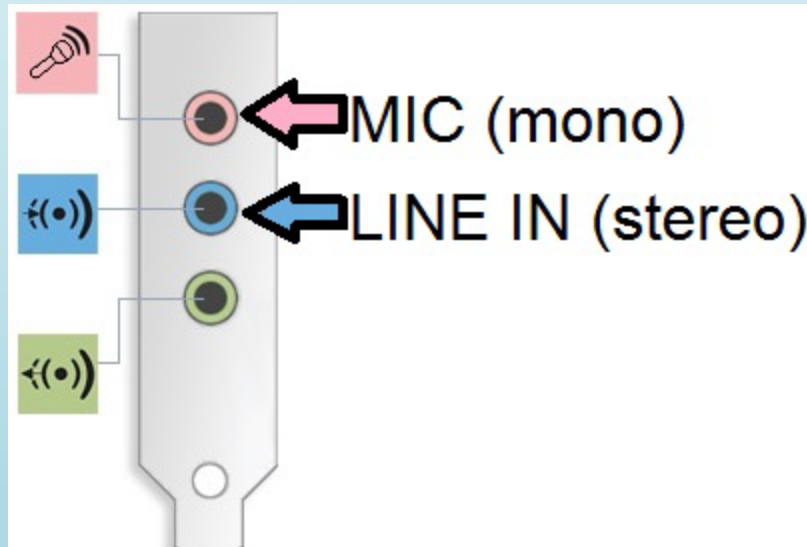

- Most notebook PC do not have a stereo LINE IN


Second challenge

- “Stereo” PC MIC jack provides DC power to small condenser mics:

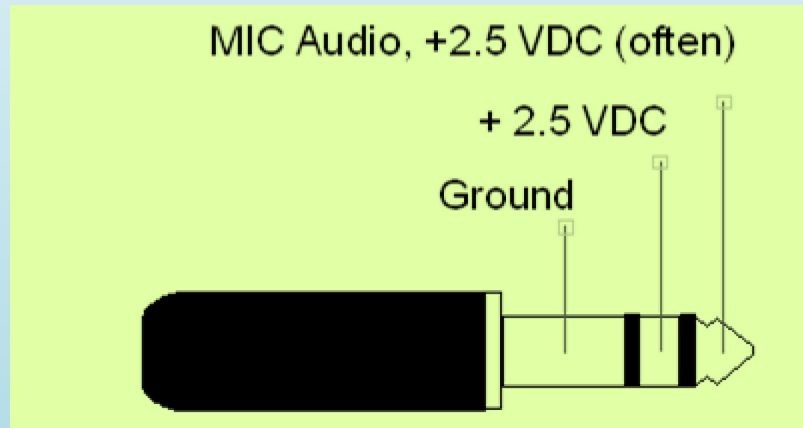



- Must block this DC voltage
 - Using mono plug grounds RING, but does *not* block DC on TIP
- Must **attenuate** headphone audio to mic. level

Solution – mix audio, block DC

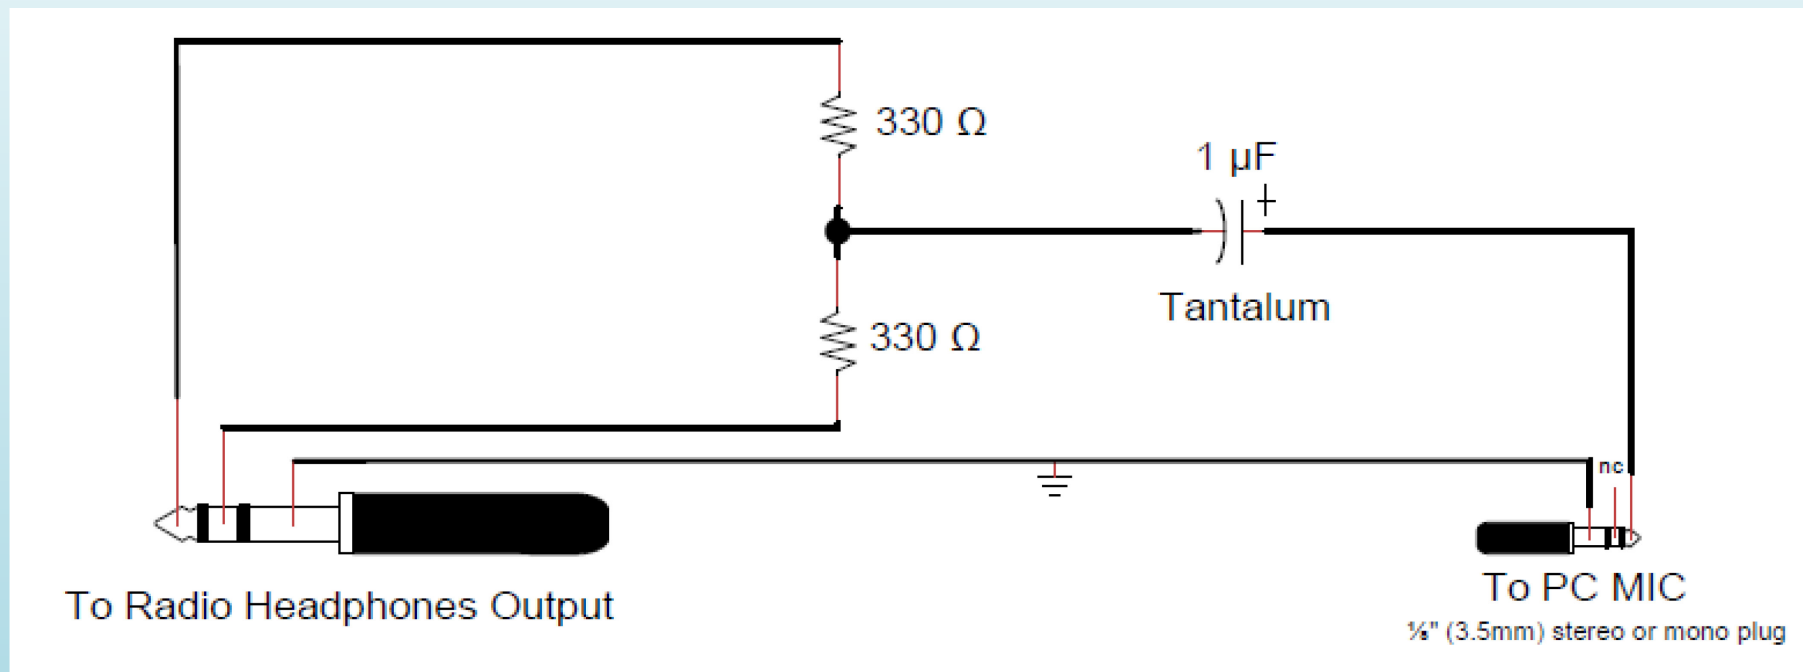

However, **mono** recordings are **not good enough** for Top 5 CQ WW competitors (OK for everyone else)

Can construct inside a
 $\frac{1}{4}$ " stereo headphone plug

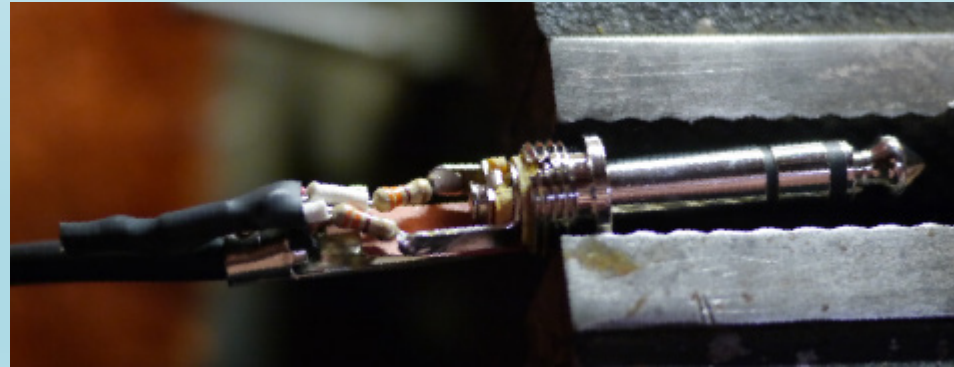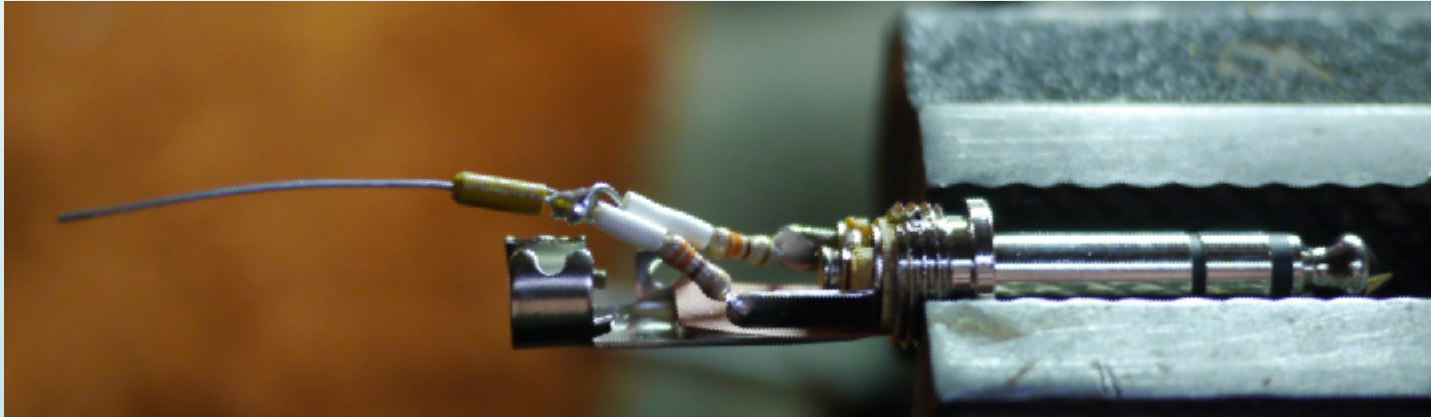


For 1/8" plugs, use a project box



For recording stereo via LINE IN

- DC blocking cap. not needed
- Use audio isolation transformer

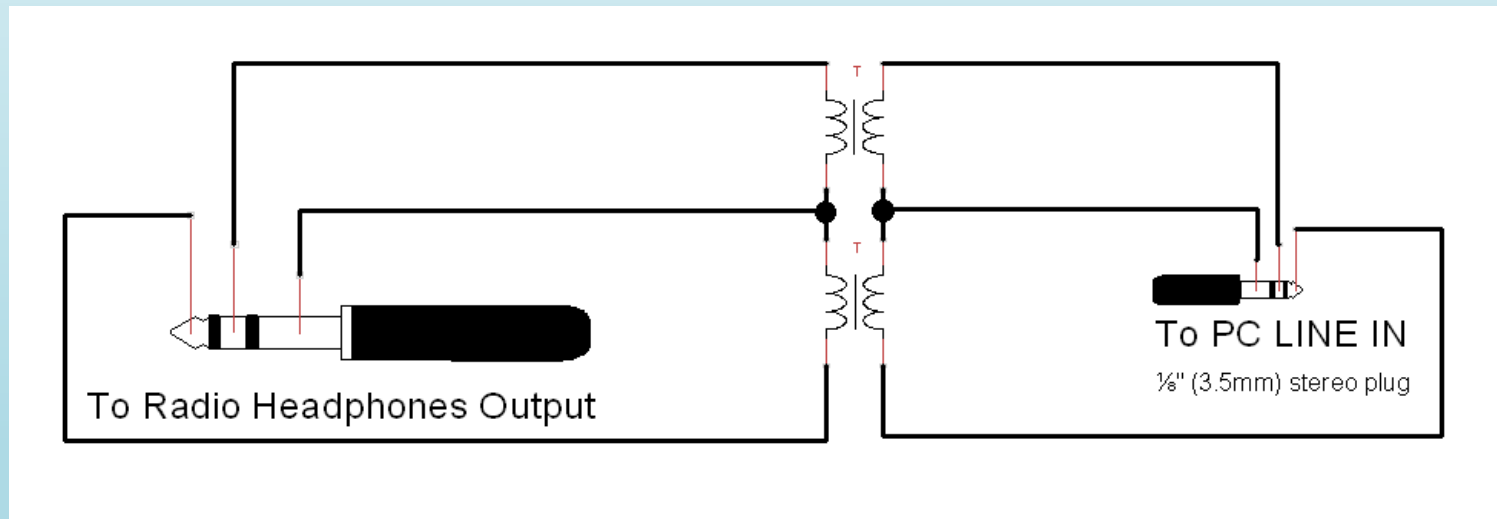

Recommended Audio Isolation Transformers (aka. “Ground Loop Isolators”)

- Multicomp P/N 555-8492 ([Newark 13AC9922](#) - \$10.21)



- Stellar Labs P/N 555-8499 ([Newark 47Y6539](#) - \$6.57)



Another option for Portable Recorders

Olympus KA-333 Compaticord, Connects Earphone or Headphone Jack Output to Mic Input Jack

by Olympus

★★★★★ ▾ 13 customer reviews | 8 answered questions



“Can’t I just connect LINE OUT to LINE IN?”

- Yes, but that’s not what you heard in your headphones
- Many radios do *not* forward audio monitor to LINE OUT
 - **Transmissions** will not be recorded
- Elecraft K3 works OK, has nice isolated stereo LINE OUT jack (K3S has USB)
 - Simple stereo patch cable from LINE OUT to PC LINE IN or MIC
 - LINE IN will record STEREO
 - MIC will record MONO
- But ...
 - LEFT channel will be VFO A (Main) only
 - RIGHT channel will be VFO B (SubRx), but *only* when SUB activated, otherwise *nothing!*
 - Transmitted audio is forwarded to *both* channels
- Recording will not match your contest experience




For radios with two headphone jacks

- Connect headphones to first jack
- Connect recording interface (xfmr) to second
- If no change in headphone audio, you're good to go



For radios (or SO2R box) with ONE headphone jack

- Using a simple stereo “T” or Y-adapter alone ...
 - Will probably cause unacceptable noise from PC
 - Ground loops
- Solution: Use **line isolation transformer** between splitter and PC

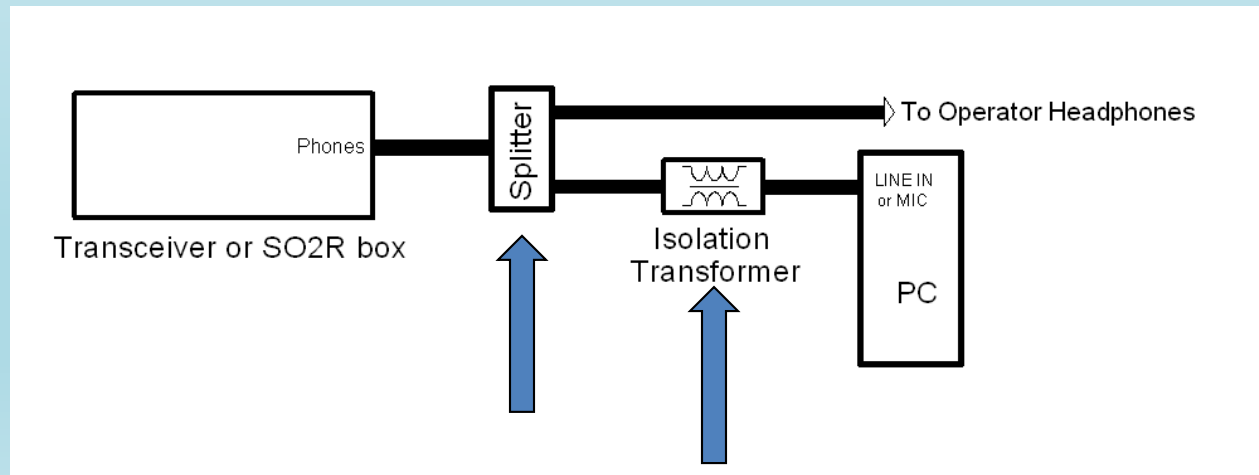

Another Option: Radio Shack® “Ground Loop Isolator”

- Works quite well (though not shielded)
- Requires phono adapters
- \$47.99 (!) on [Amazon.com](https://www.amazon.com)
- Cat. No. 270-054



Ebtech Hum Eliminator

- Two isolated LINE IN / OUT pairs, shielded
- Four ¼" **MONO** phono connectors
- Requires phono to stereo adapters



Avoiding the Analog Problems

- Some radios have a S/PDIF (digital optical) audio output
- Requires sound card with S/PDIF input:



HDE USB 2.0 External Sound Card 6 Channel 5.1 Surround Sound Optical Audio Output Adapter for PC and Mac

by HDE

★★★★☆ 90 customer reviews
| 34 answered questions

Price: \$13.99 ✓prime

S/PDIF IN

(Analog Stereo Line IN)



Contest Academy



20

Modern HF transceivers provide USB sound card interface

- Radio treated as external sound card named **USB AUDIO CODEC**
- USB Sound Card Radios:
 - Elecraft K3S (or K3 with KIO3B upgrade)
 - Icom IC-7300, IC-7610, IC-7850, IC-7851
 - Kenwood TS-590S, TS-990S, TS-890S
 - Yaesu FT-991
 - FlexRadio 6700
- No need for isolation transformer, splitter, or level conversion circuit
- Use USB Audio CODEC as recording source



However ...

- Transmitted audio may *not* be recorded
 - Icom rigs record transmitted SSB OK
 - Icom rigs do *not* record transmitted CW *unless* you set **AF Beep/Speech... Output to ON** (defaults to OFF)
- It *may* be possible to use radio USB sound card as *both* voice keyer and contest recorder at same time (works OK in IC-7851, had trouble with others)




Recording SO2R (now it gets complicated)

- Easiest (but most expensive) solution: microHAM MK2R+ (does it all)




- Includes two USB Sound Cards (DVK + Stereo Recording)
- Will record “What You Hear” in headphones
- Set recording source to microHAM **USB Audio CODEC**

For SO2R, consider recording output of headphone switch

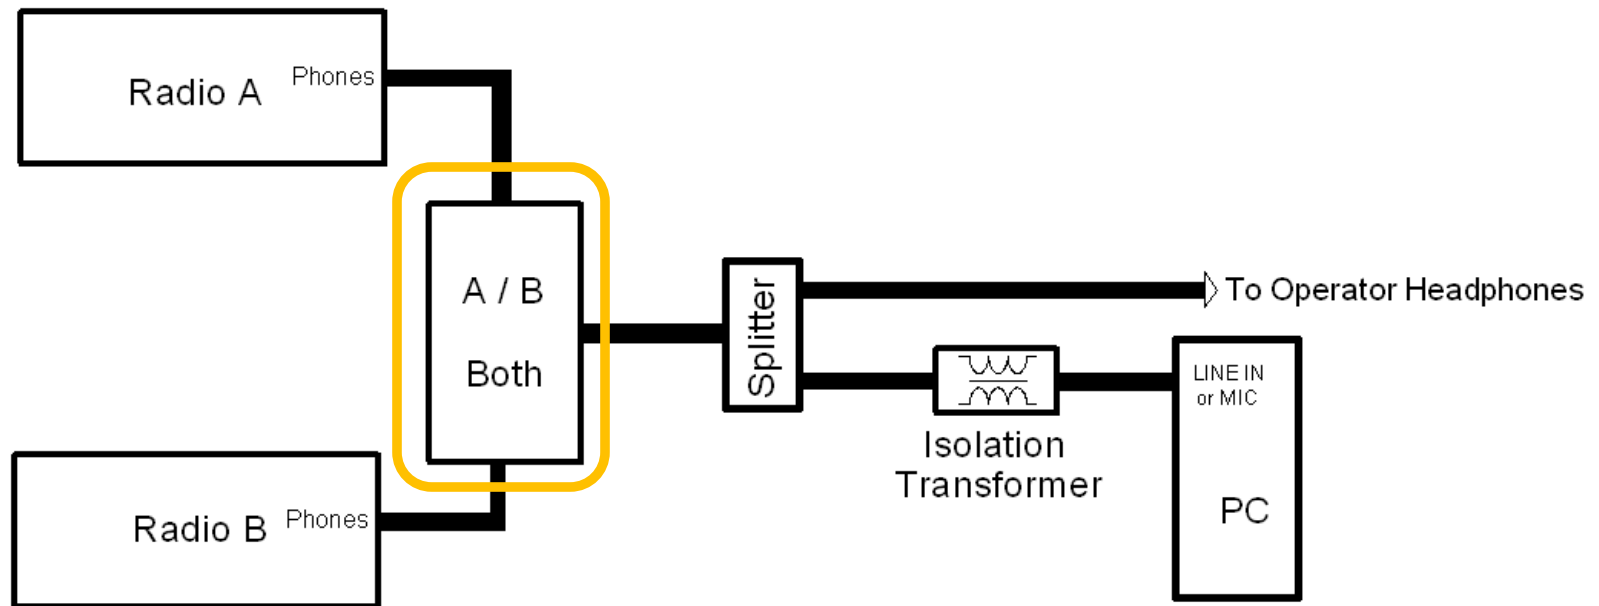



For WRTC 2018

VFO A of Two Radios Recorded with Stereo External USB Sound Card

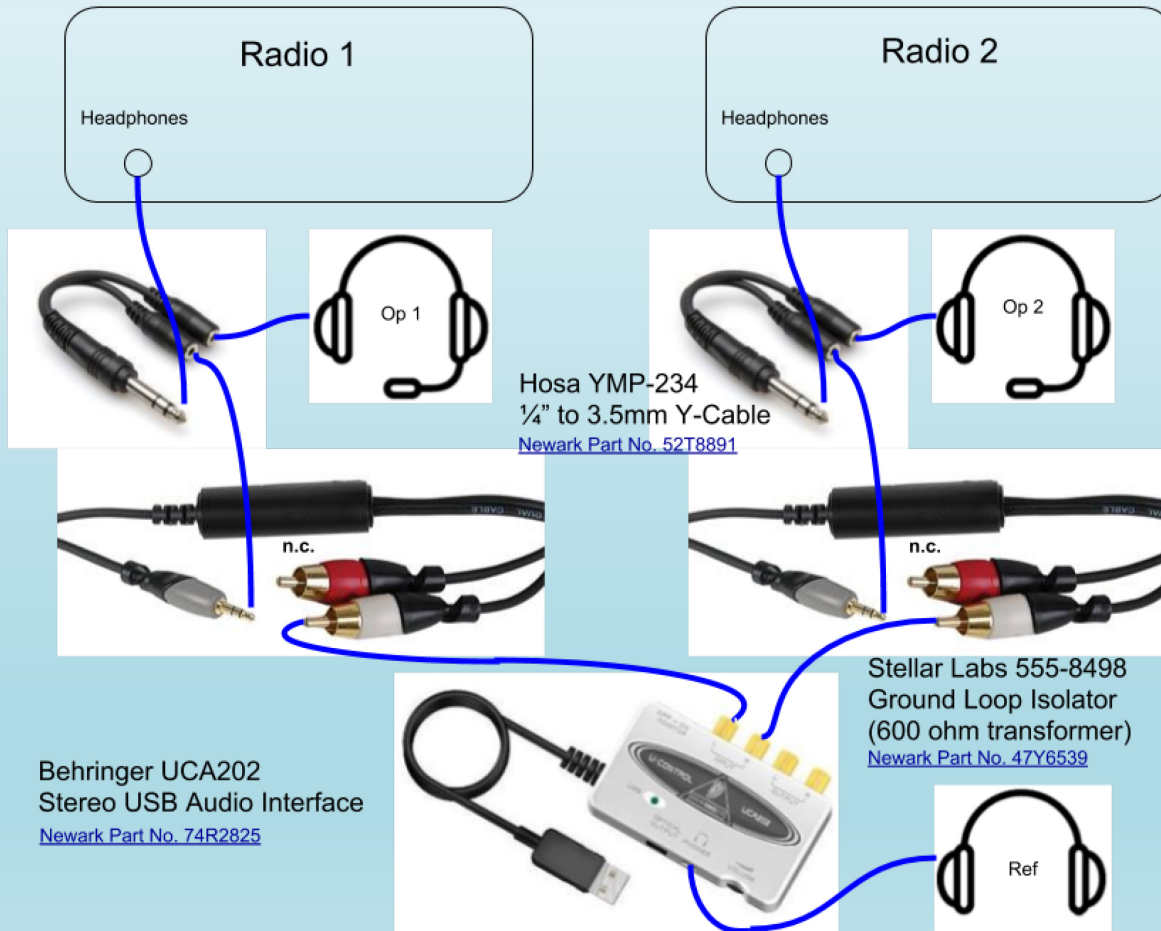

SO2R Digital Recording

- Can use Virtual Audio Cable (VAC) “Repeaters” to mix digital stereo inputs together

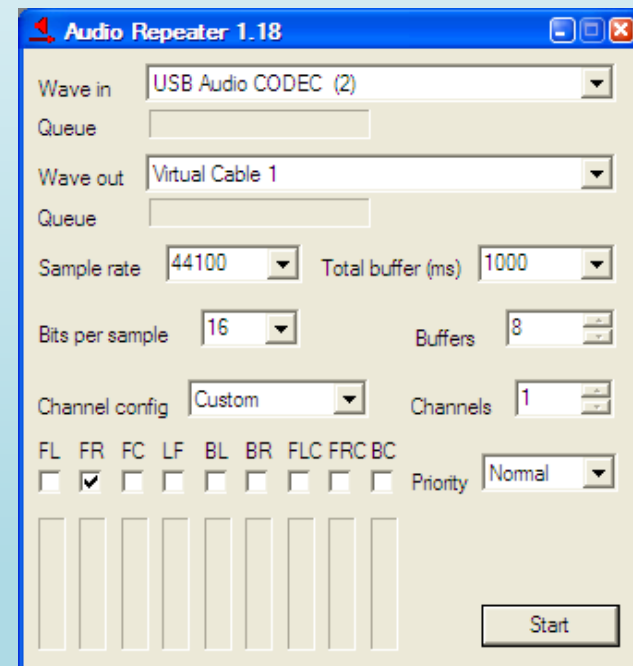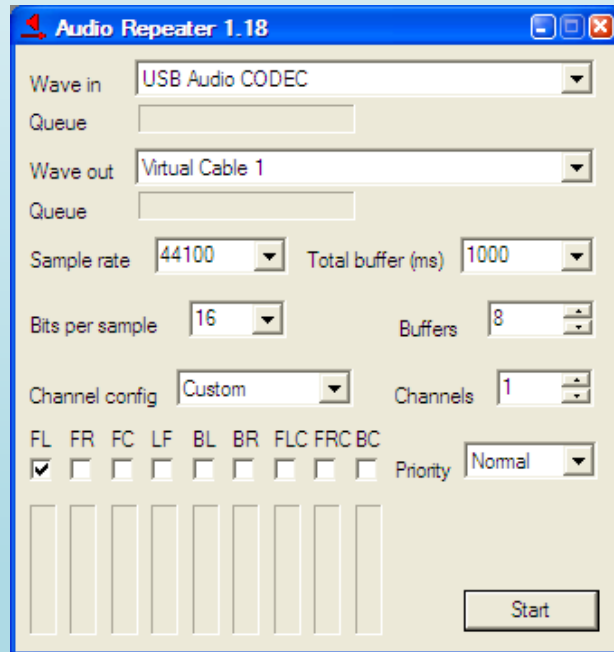


- But ... verify USB sound card records **transmitted** audio

A Test – Mix four audio sources

- Four audio channels mixed into a single Virtual Cable for recording in stereo
 - Left Channel: Rig A Main + SubRx (stereo-to-mono mix)
 - Right Channel: Rig B Main + SubRx (stereo-to-mono mix)
- Had to define of five (5) VACs
- Had to start six (6) VAC Audio Repeaters



Here's what it looked like

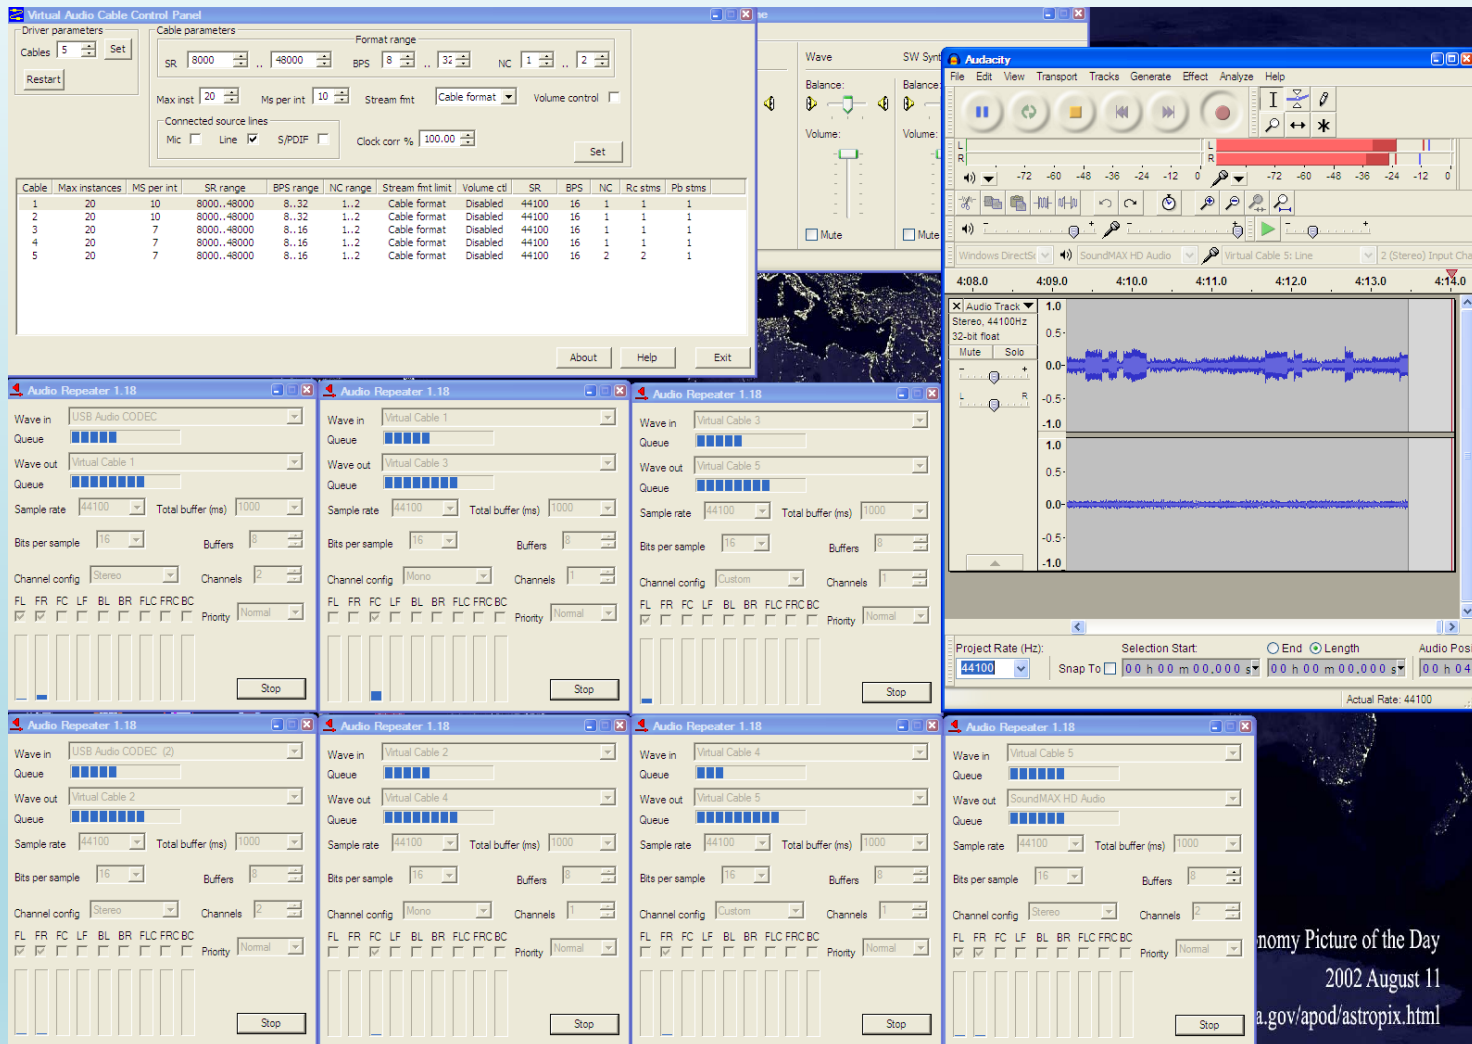

Defining Five VACs

Virtual Audio Cable Control Panel

Driver parameters

Cables

Cable parameters

Format range

SR .. BPS .. NC ..


Max inst Ms per int Stream fmt Volume control ☐

Connected source lines

Mic ☐ Line ☒ S/PDIF ☐ Clock corr %

Cable	Max instances	MS per int	SR range	BPS range	NC range	Stream fmt limit	Volume ctl	SR	BPS	NC	Rc stms	Pb stms
1	20	10	8000..48000	8..32	1..2	Cable format	Disabled	44100	16	1	1	1
2	20	10	8000..48000	8..32	1..2	Cable format	Disabled	44100	16	1	1	1
3	20	7	8000..48000	8..16	1..2	Cable format	Disabled	44100	16	1	1	1
4	20	7	8000..48000	8..16	1..2	Cable format	Disabled	44100	16	1	1	1
5	20	7	8000..48000	8..16	1..2	Cable format	Disabled	44100	16	2	2	1


Chaining VAC repeaters to mix Stereo to Mono to Left Channel

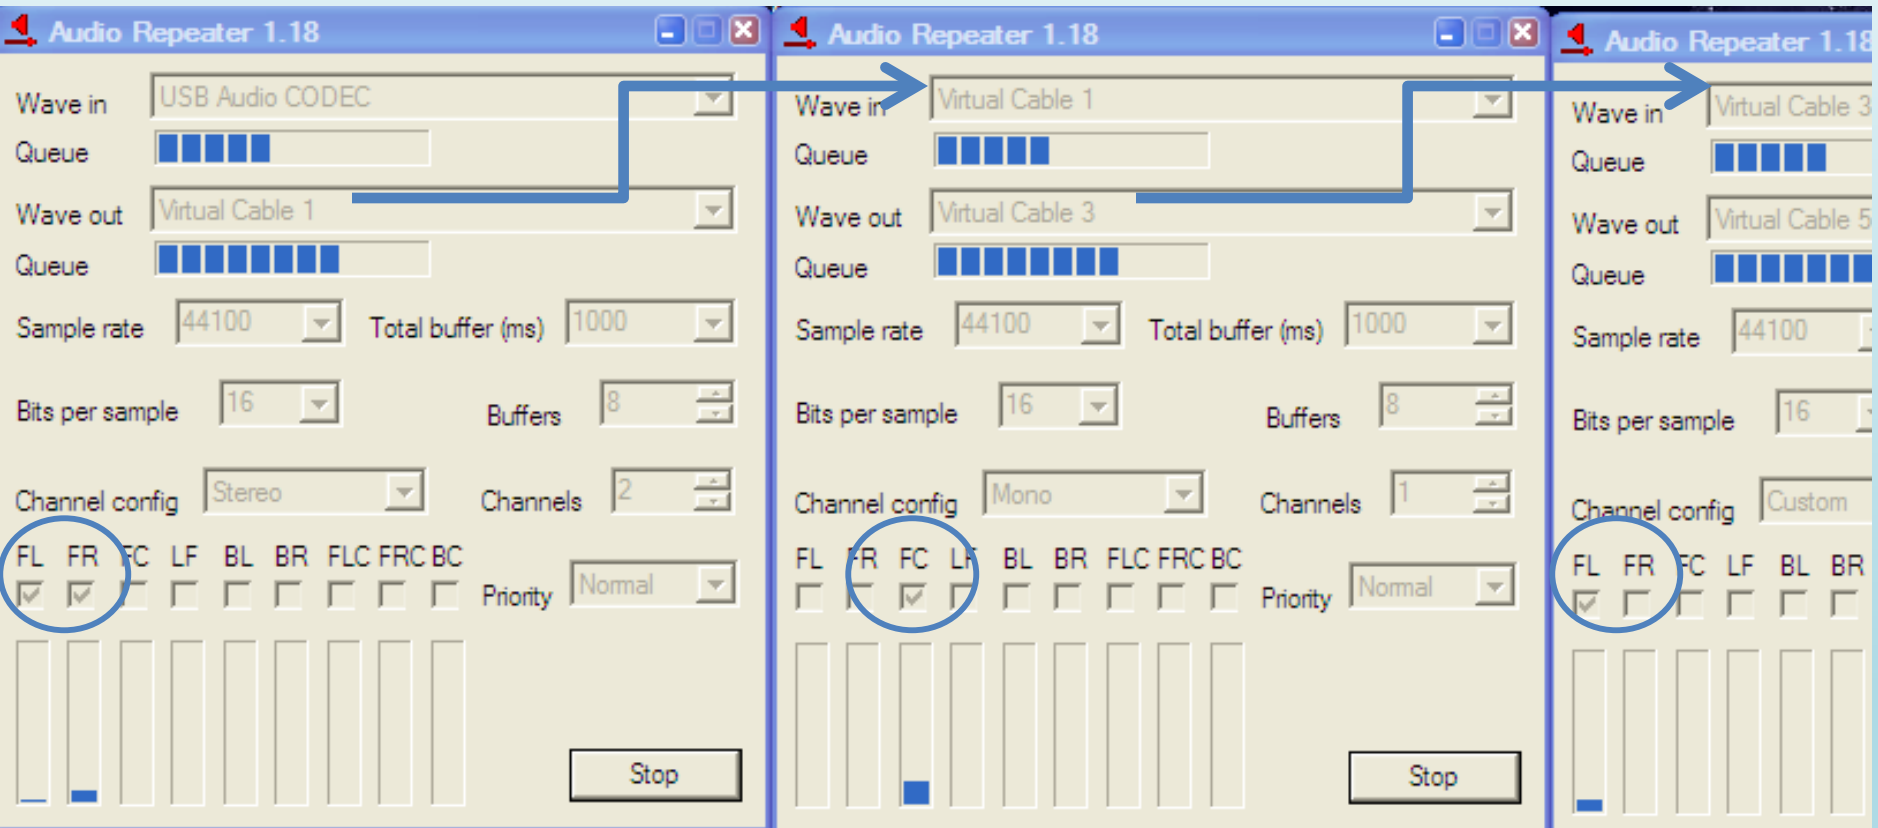

How to Autostart Audio Repeaters

- Can use Windows shortcut, but batch file can automate startup:
 - Left Channel:
`"C:\Program Files\Virtual Audio Cable\audiorepeater.exe"
/Input:"USB Audio CODEC " /Output:"Virtual Cable 1" /Channels:1
/ChanCfg:custom=1 /SamplingRate:44100 /BitsPerSample:16 /AutoStart`
 - Right Channel:
`"C:\Program Files\Virtual Audio Cable\audiorepeater.exe"
/Input:"USB Audio CODEC (2)" /Output:"Virtual Cable 1"
/Channels:1 /ChanCfg:custom=2 /SamplingRate:44100
/BitsPerSample:16 /AutoStart`
- Had to use extra blanks in CODEC names!
- Arguments are *case-sensitive*

Rec. volume set by VAC WAV Output

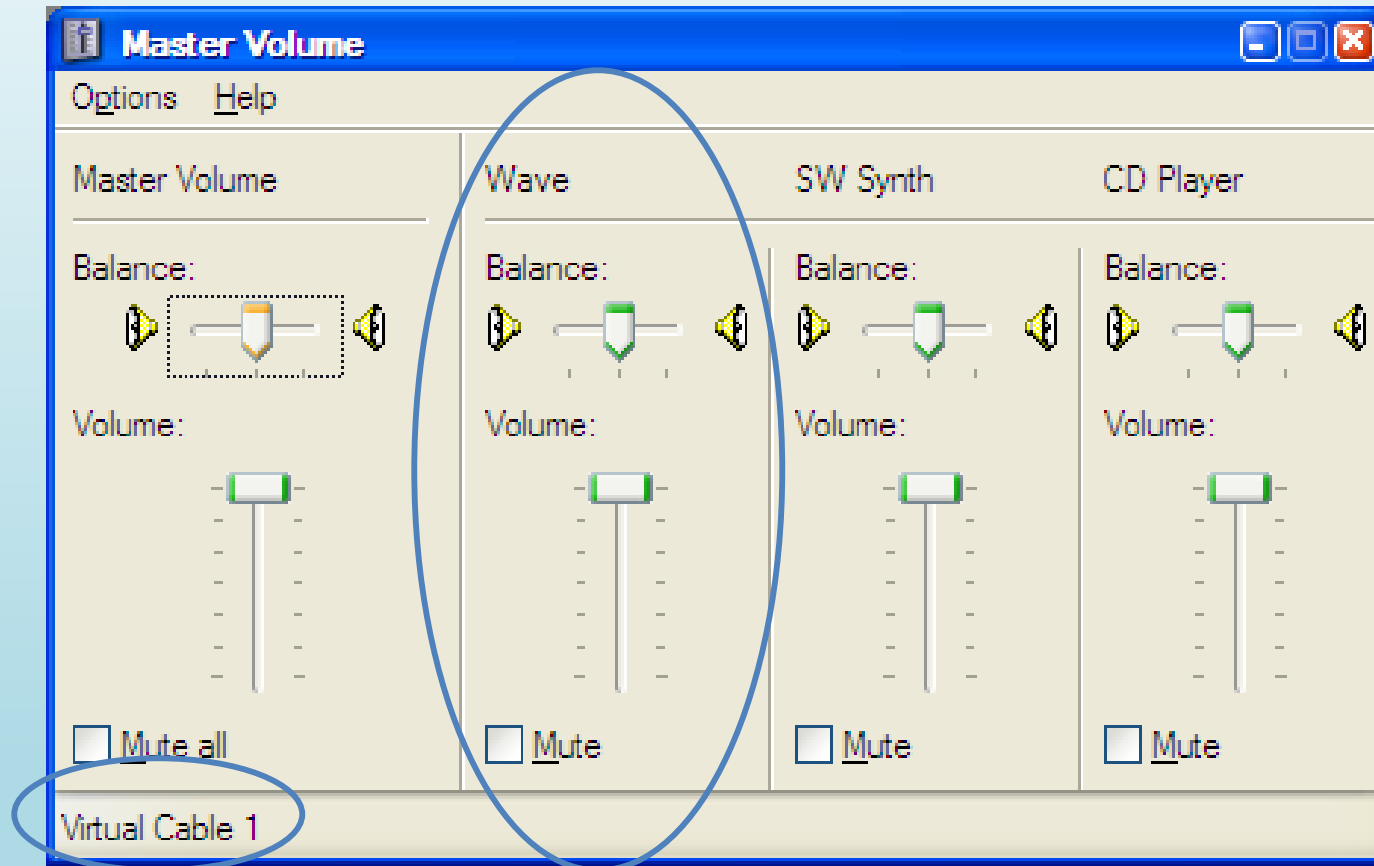


What if two computers are used for SO2R?

- You need two sound cards in one PC
- Use Virtual Audio Cable to mix them
 - USB Audio CODEC (From Rig A, local, digital)
 - USB Audio CODEC 2 (USB Sound Card)
LINE IN/MIC (From Rig B, remote, analog)
-or-
S/PDIF IN (digital)
- Supports single combined stereo recording of two radios on single PC
- Recording analog headphone output is much simpler, but requires audio isolation transformers




How to add a second sound card?

- Try external USB (HDE 6 shown previously)
- Turtle Beach Audio Advantage Amigo II (hard to find)

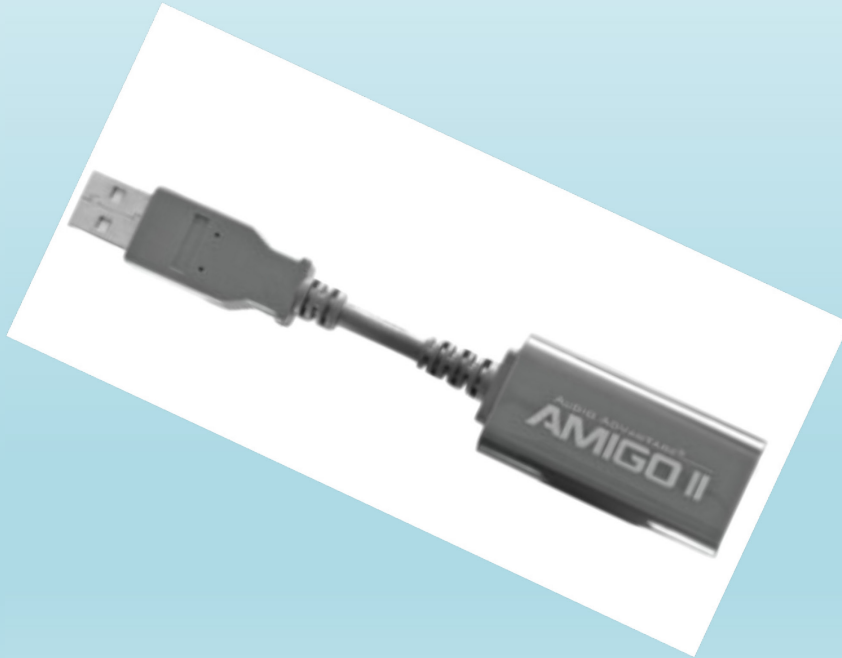

Downloading and Buying Virtual Audio Cable

- <https://vac.muzychenko.net/en/>
 - ~\$25.20 (self-support), \$35 (basic support), \$50.05 (extended support)

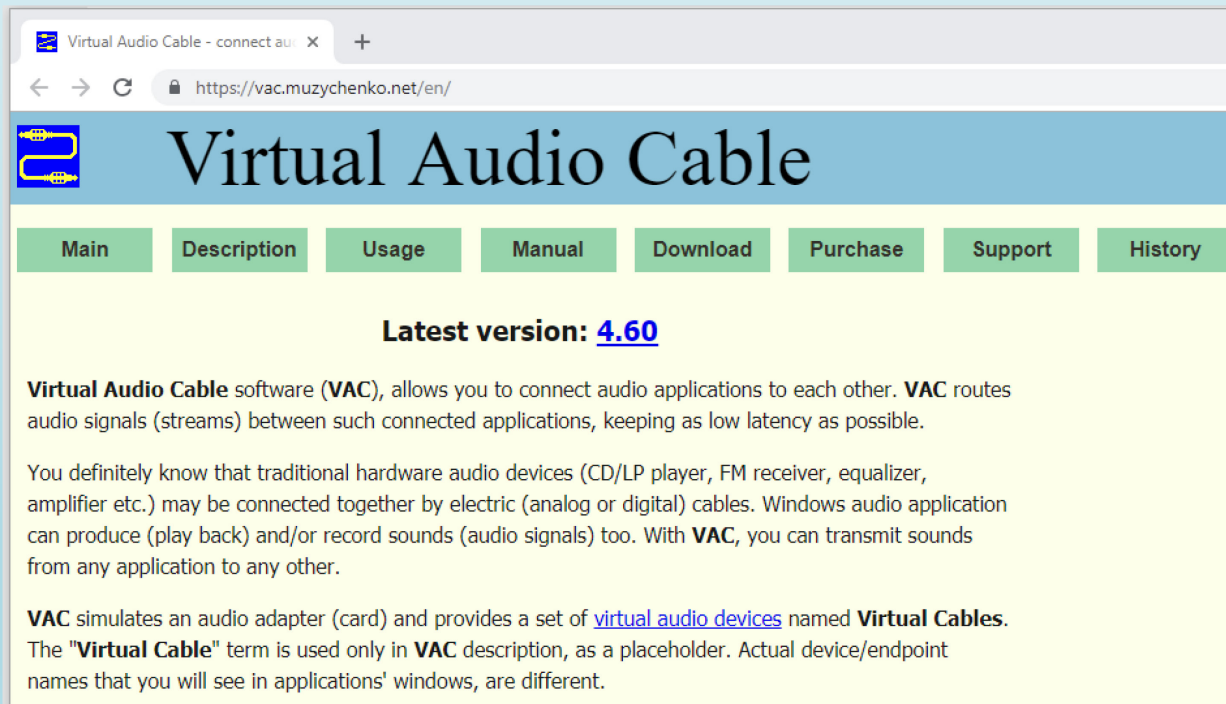

Using Logging Software to Record

- Example is from Win-Test (others briefly)
- Recording to MP3 using the Fraunhofer CODEC (built-in to Windows, but hidden)
- Compressed audio files < 700 MB / 48 hours
- Play back any QSO using logging window
- Just move cursor to QSO and click **Play** button



First, we need Fraunhofer MP3 CODEC

- Windows XP has it already
- For Windows Vista to Win10, enable CODEC by running batch file:
The **Chortkeh fix** (updates the Windows registry)
- Download from
<http://www.komeil.com/download/264>

Getting the Chortkeh Fix

- <http://www.komeil.com/download/264>

chortkeh fix mp3 codec.cmd - K... x +

← → ↻ ⓘ Not secure | www.komeil.com/download/264

☆ Incognito

Tweet Like 2 Share

Comprehensive and easy to use
PRTG Is Easy To Set Up And Notifies You Long Before Your Boss Picks Up The Phone. Paessler AG

DOWNLOAD

Do *NOT* click here

Komeil Bahmanpour > Download Center > 2008 > 06 > enabling-fraunhofer-mp3-codec-vista > chortkeh-fix-mp3-codec.cmd

Related article: [Enabling Fraunhofer IIS MPEG Layer-3 Codec \(Professional\) in Windows 10, 8.1, 7, Vista and Windows Server 2016 down to 2008](#)

chortkeh-fix-mp3-codec.cmd

Patch to enable Fraunhofer IIS MPEG Layer-3 ACM codec (professional) in Windows 10, 8.1, 8, 7, Vista and Windows Server 2016, 2012 R2, 2012, 2008 R2, 2008

Download

Click here!

Information
File type: Windows NT Command Script
Size: 3.84 kB
Date added: 6/29/2008 11:51:15 PM
Date modified: 11/9/2015 1:20:52 AM

Comprehensive and easy to use
PRTG Is Easy To Set Up And Notifies You Long Before Your Boss Picks Up The Phone. Paessler AG

DOWNLOAD


Running the Chortkeh fix batch file (.cmd)

- Download the .cmd file
- Right click on the .cmd file and select **Run as an Administrator**
- No reboot required, just restart Win-Test



Set Recording Parameters (Win-Test)

- From the menu, select **Options | MP3 Configuration...** or type **MP3SETUP** [Enter] in the logging window

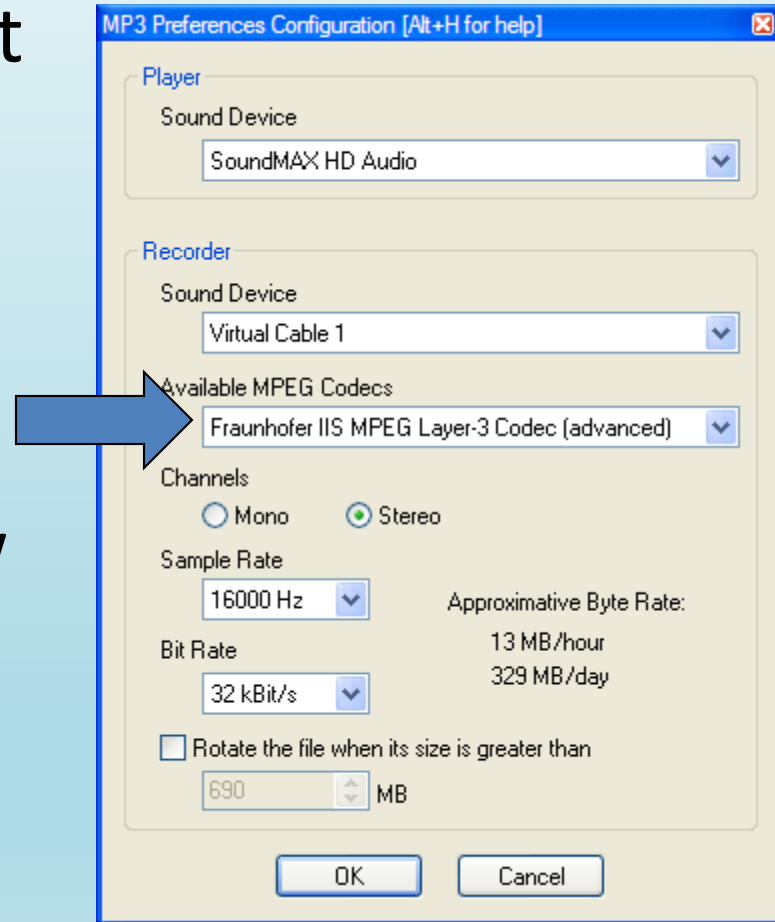


Before the contest starts, start recording

- From the menu, select **Windows | Contest Recorder**

- Click the record button



- Check **start recording automatically**, click **OK**

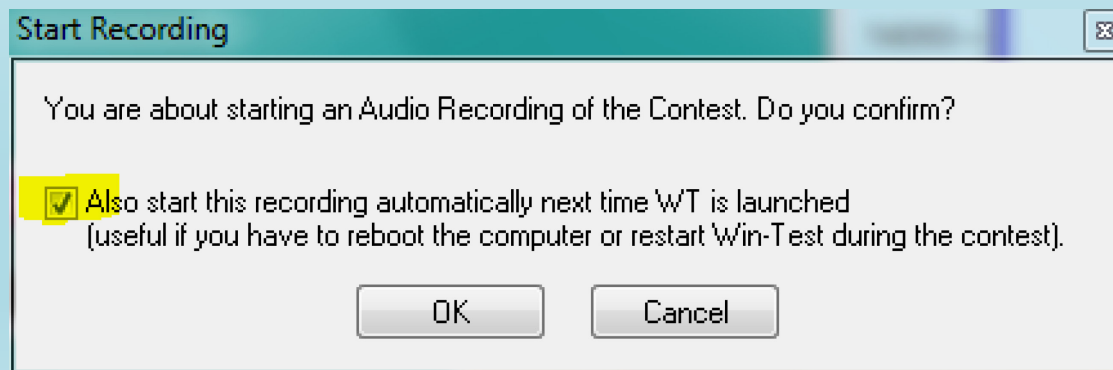

Recorder starts recording

- Recording normally:



- Record level too high!





Setting record levels

- Better to record **too low** than too high (amplify later)
- Don't let audio peaks get into red zone
- Adjustment varies by **recording source**:
 - Headphone jack –
Radio volume control + PC Sound Card MIC or LINE IN slider
Recording Devices > Properties > Levels
 - LINE OUT jack – Fixed level, a radio setting
K3 CONFIG:LIN OUT
 - USB Audio CODEC (radio sound card) – Icom Menu
USB MOD LEVEL
 - USB Audio CODEC (microHAM MK2R+) –
Turn level **knobs** on SO2R box, top right corner
 - Virtual Cable 1 –
WAV OUT slider




Setting sound card record level

- **Right click** on speaker icon in Windows task bar, then select **Open Sound Settings**
- Click **Sound Control Panel**
- Select **Recording** tab
- Click to select source
- Click **Properties** button
- Click **Levels** tab

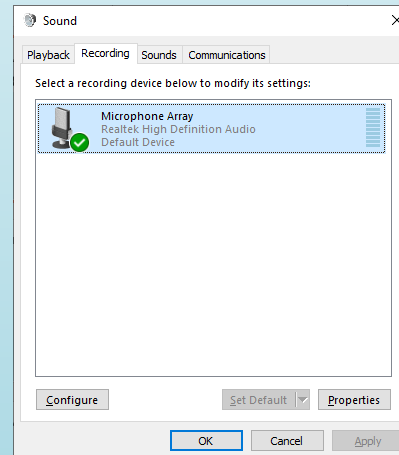

Windows 10 Recording Levels

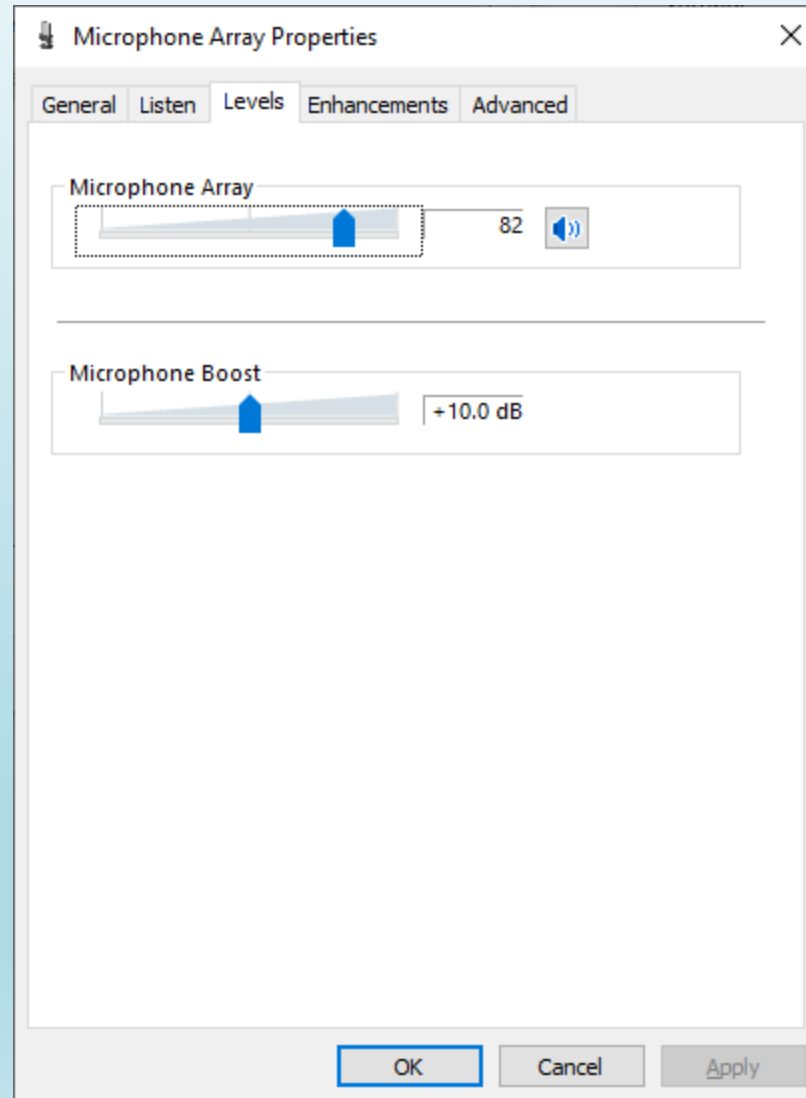

Publish contest audio on the web

- Win-Test QSO Player

<http://download.win-test.com/utils/wtQsoPlayer.zip>


- Generates Web Page, e.g. <http://bit.ly/R39Maudio>

Listen to your QSO with R39M during the 2010 World Radiosport Team Championship (WRTC) contest!



Enter your callsign :

Recording with N1MM+ Logger

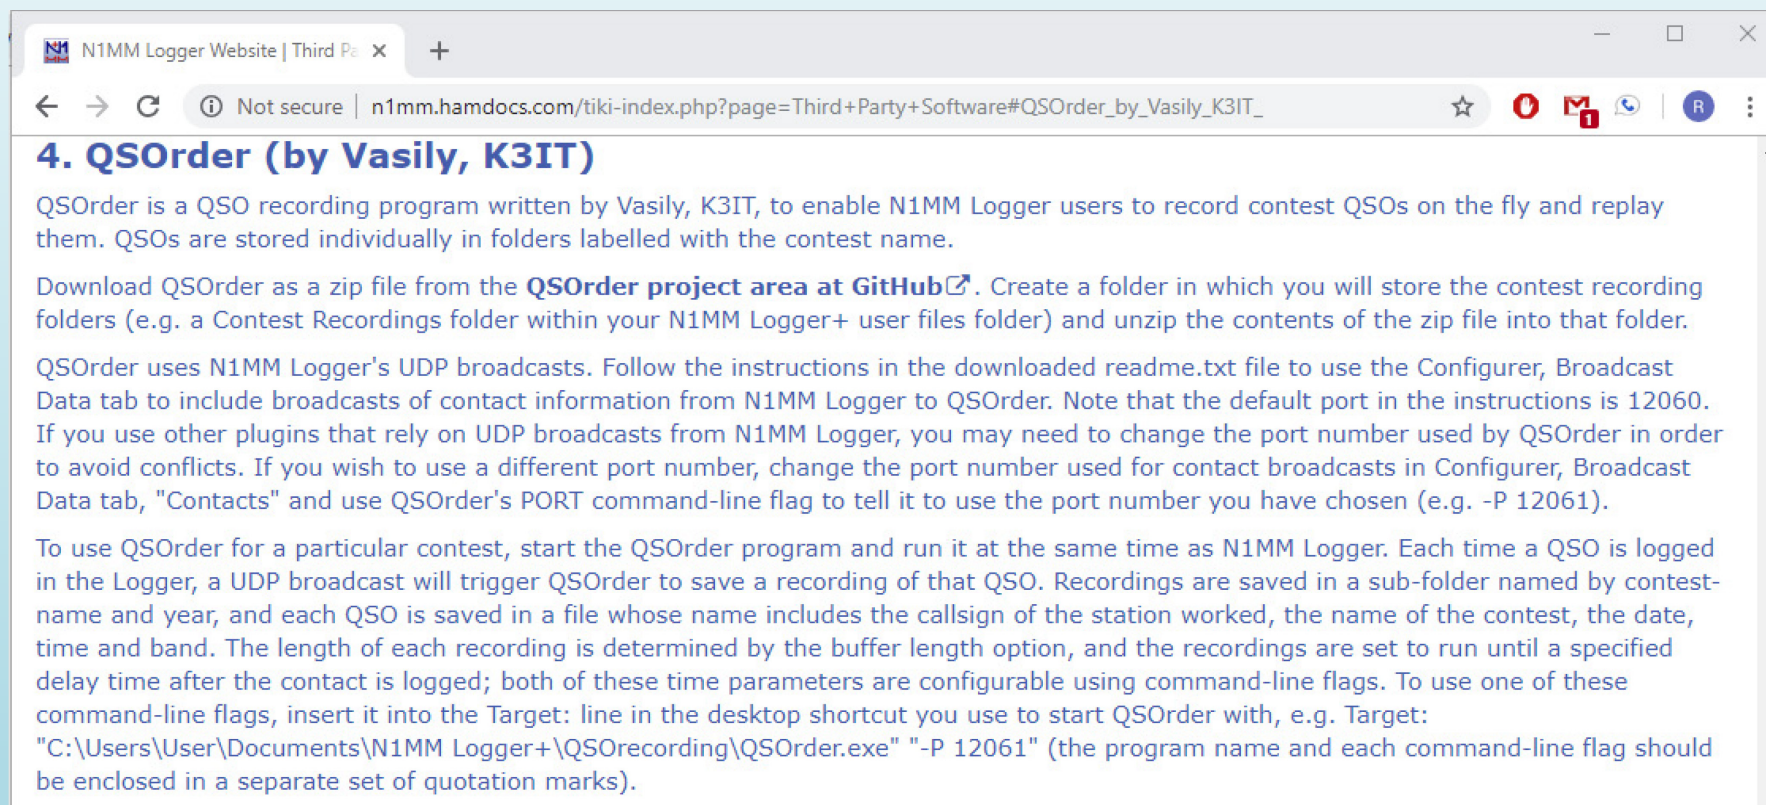

4. QSOOrder (by Vasily, K3IT)

QSOOrder is a QSO recording program written by Vasily, K3IT, to enable N1MM Logger users to record contest QSOs on the fly and replay them. QSOs are stored individually in folders labelled with the contest name.


Download QSOOrder as a zip file from the [QSOOrder project area at GitHub](#). Create a folder in which you will store the contest recording folders (e.g. a Contest Recordings folder within your N1MM Logger+ user files folder) and unzip the contents of the zip file into that folder.

QSOOrder uses N1MM Logger's UDP broadcasts. Follow the instructions in the downloaded readme.txt file to use the Configurer, Broadcast Data tab to include broadcasts of contact information from N1MM Logger to QSOOrder. Note that the default port in the instructions is 12060. If you use other plugins that rely on UDP broadcasts from N1MM Logger, you may need to change the port number used by QSOOrder in order to avoid conflicts. If you wish to use a different port number, change the port number used for contact broadcasts in Configurer, Broadcast Data tab, "Contacts" and use QSOOrder's PORT command-line flag to tell it to use the port number you have chosen (e.g. -P 12061).

To use QSOOrder for a particular contest, start the QSOOrder program and run it at the same time as N1MM Logger. Each time a QSO is logged in the Logger, a UDP broadcast will trigger QSOOrder to save a recording of that QSO. Recordings are saved in a sub-folder named by contest-name and year, and each QSO is saved in a file whose name includes the callsign of the station worked, the name of the contest, the date, time and band. The length of each recording is determined by the buffer length option, and the recordings are set to run until a specified delay time after the contact is logged; both of these time parameters are configurable using command-line flags. To use one of these command-line flags, insert it into the Target: line in the desktop shortcut you use to start QSOOrder with, e.g. Target: "C:\Users\User\Documents\N1MM Logger+\QSOrecording\QSOOrder.exe" "-P 12061" (the program name and each command-line flag should be enclosed in a separate set of quotation marks).



Recording with WriteLog

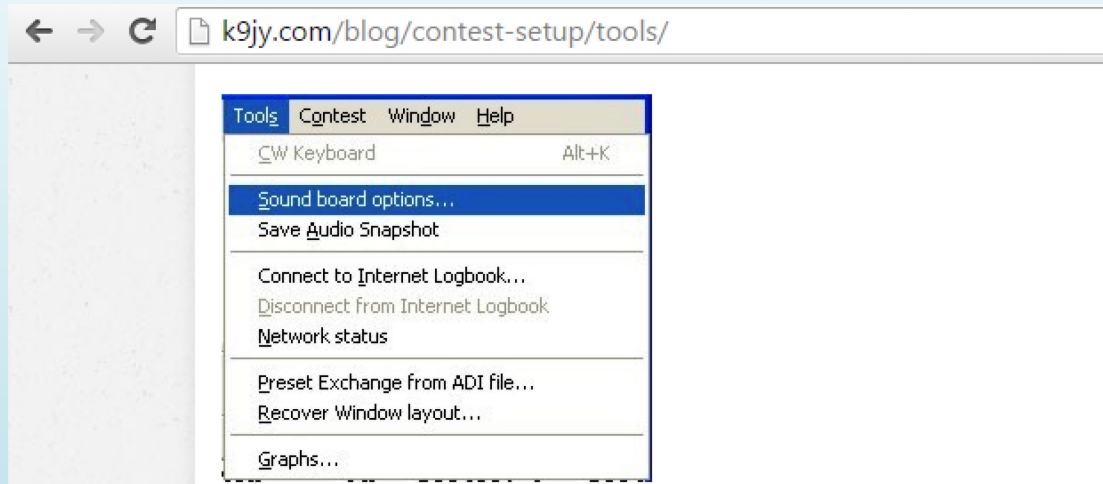

Clicking on the selection produces the following dialog box:



Reviewing your Log Check Report

- <http://www.arrl.org/contest-log-checking-reports>
Sign in to see your LCRs
- Not an ARRL Member? Use:
<http://contests.arrl.org/logcheckreports.php>
- <http://www.cqww.com/lcr/>
<http://www.cqwp.com/lcr/>

“An email with the link to your private log checking report is sent to the email account you used to submit the log.”



What you'll see in the LCR

- CROSS CHECK RESULTS

QSO #151: Received QSO# 59 should be 69 NØIJ

QSO #220: QSO not found in log of WA1S

QSO #533: Received QSO# 5 should be 56 KS7T

QSO #546: QSO not found in log of VE3MM

QSO #638: Received QSO# 281 should be 28 VE4DXR

- Go back and listen to these QSOs and figure out what happened
- Cross check results not perfect, but usually *very* good
- Best way to learn is from your mistakes, so *listen* to them



To Review

- Recording mono to a sound card is easy
- Recording stereo is harder
- Recording two stereo radios (SO2R) is even harder
- Recording what you hear in the headphones – **best choice for SO2R**
- Use real cables / isolators
- USB Sound Card digital mixing can work, but is complicated
- Review your Log Checking Reports and learn from the recordings



Questions?

- <https://www.qrz.com/db/N6TV>
Links to this and other presentations
- https://www.k6jrf.com/FT_HUM.html
K6JRF Technical Review of Audio Isolators
- <http://www.audiosystemsgroup.com/publish.htm>
K9YC on “Hum, Buzz, and RF Interference”
- <https://vac.muzychenko.net/en/>
Virtual Audio Cable

